


## Standing Workstation Specifications

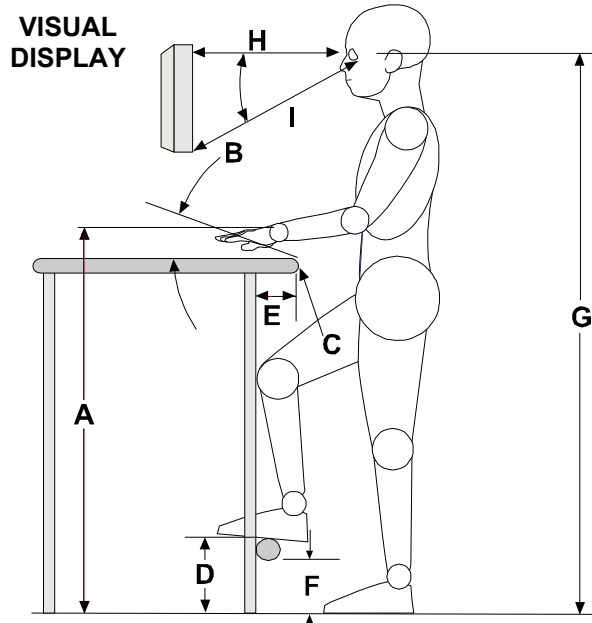

Zone	Description	Dimension		
<b>A</b>	<b>Height:</b> Distance from standing surface to hand work height.	Adjustable Table	Fixed Table <i>With standing platform</i>	Fixed Table <i>Without standing platform</i>
	Precision	37" to 50"	50"	44"
	Light assembly	33" to 47"	47"	42"
	Heavy assembly	28" to 42"	42"	36"
<b>B</b>	<b>Angle:</b> Angle of work surface in comparison to table surface.	Adjustable from -6° to 30° (-) = away from operator (+) = towards operator		
<b>C</b>	<b>Rounded edges:</b> Workstation surfaces that come in contact with soft tissue should be rounded.	At least ¼" radius		
<b>D</b>	<b>Foot rail height:</b> Distance to foot support surface.	6" off floor or standing level		
<b>E</b>	<b>Knee clearance:</b> Depth from front of table edge.	Minimum of 5"		
<b>F</b>	<b>Foot clearance:</b> Height from foot support surface. Depth from front of any obstruction.	6" high 6" deep		
<b>G</b>	<b>Display height:</b> Distance from standing surface to top of viewable portion of display screen.	Adjustable: 54"-68" Fixed: 54"		
<b>H</b>	<b>Horizontal Viewing Distance:</b> Distance from the worker to the visual display.	18-30"		
<b>I</b>	<b>Vertical Viewing Angle:</b> Optimal viewing angle below the normal line of site (top of display).	0° - 30°		
	<b>Anti fatigue matting</b>	At least ½" thick		
	<b>Handrail height:</b> Distance from floor to handrail.	26" to 34" from floor		
	<b>Shelf height:</b> Distance from floor to shelf height.	Maximum of 48"		